

# CORDED COMPOSITE, POLYESTER STRAPPING



## ONE-WAY LASHING SYSTEM

# CORDED COMPOSITE STRAPPING

**Corded composite strapping** is packaging strap for replaces steel strapping for all applications with special features which give it a competitive edge over conventional steel straps. The corded composite strap is made from 100% high tenacity polyester yarn with protected by thermoplastic coating. There is CS strap size 13 mm. - 32 mm. are also mostly used for securing loads inside containers and all multi purpose securing.



COMPOSITE STRAP

Description	Type	Linear B/S	System B/S	Width		Package
				mm.	inches	
Composite Strap	CS-1305	300 kgs	480 kgs	13 mm.	1/2"	1,000 m./roll
Composite Strap	CS-1607	425 kgs	680 kgs	16 mm.	5/8"	850 m./roll
Composite Strap	CS-1910	625 kgs	1,000 kgs	19 mm.	3/4"	600 m./roll
Composite Strap	CS-2512	785 kgs	1,256 kgs	25 mm.	1"	500 m./roll
Composite Strap	CS-3224	1,500 kgs	2,400 kgs	32 mm.	1-1/4"	250 m./roll
Composite Strap	CS-3226	1,625 kgs	2,600 kgs	32 mm.	1-1/4"	230 m./roll



WIRE BUCKLE

Description	Type	Breaking Strength	Width		Package
			mm.	inches	
Wire Buckle Galv.	WB-1305	480 kgs	13 mm.	1/2"	1,000 pcs/box
Wire Buckle Galv.	WB-1607	680 kgs	16 mm.	5/8"	1,000 pcs/box
Wire Buckle Galv.	WB-1908	760 kgs	19 mm.	3/4"	1,000 pcs/box
Wire Buckle Galv.	WB-2512	1,256 kgs	25 mm.	1"	500 pcs/box
Wire Buckle Galv.	WB-2518	1,800 kgs	25 mm.	1"	250 pcs/box
Wire Buckle Galv.	WB-3220	2,000 kgs	32 mm.	1-1/4"	150 pcs/box
Wire Buckle Galv.	WB-5030	3,000 kgs	50 mm.	2"	100 pcs/box



TP-310

Tensioner with oilless bearing in handle and base.  
For 3/8"-3/4" Cord strapping



TP-243

Tensioner with oilless bearing in handle and bearing in base.  
For 3/8"-3/4" Cord strapping



TP-391

Heavy duty aluminium Tensioner with oilless bearing in handle and base.  
For 3/8"-3/4" Cord strapping



TP-472

Heavy duty aluminium Tensioner with oilless bearing in handle and base.  
For 3/4"-1-1/2" Cord strapping



TP-482

Heavy duty aluminium tensioner with oilless bearing in handle and base.  
For 1"-2" Cord strapping



- ✓ High tenacity polyester yarn with thermoplastic coating protected
- ✓ Strong & Safe
- ✓ Light weight & Easy to use
- ✓ Protect Surface & Finish products
- ✓ Prevent damage
- ✓ Elongation & Shock absorbing
- ✓ Chemical resistant
- ✓ Without Rust, Rot & mildew

# ONE-WAY LASHING WEBBING


**One-Way Lashing Webbing** (Woven Strap) is packaging for all applications with special features for heavy duty used. It to replaces steel strap and ratchet strap that easy to used and design for safe cost. The One-Way Lashing Webbing is made from 100% high tenacity polyester fibre. There is LS strap size 32 mm. - 50 mm. are also mostly used for cross lashing inside containers and all multi purpose securing loads of transportation.

## POLYESTER WEBBING



Description	Type	Breaking Strength	Width		Package	Recommend Buckles
			mm.	inches		
Lashing Webbing	LS-2515	1,500 kgs	25 mm.	1"	100 m./roll	WB-2518
Lashing Webbing	LS-3220	2,000 kgs	32 mm.	1-1/2"	100 m./roll	OWB-3516
Lashing Webbing	LS-3530	3,000 kgs	35 mm.	1-3/8"	100 m./roll	OWB-3835
Lashing Webbing	LS-4250	5,000 kgs	42 mm.	1-5/8"	100 m./roll	OWB-4250
Lashing Webbing	LS-5060	6,000 kgs	50 mm.	2"	100 m./roll	OWB-5070
Lashing Webbing	LS-5075	7,500 kgs	50 mm.	2"	100 m./roll	OWB-5070
Lashing Webbing	LS-4530	3,000 kgs	45 mm.	1-3/4"	100 m./roll	OWB-5030
Lashing Webbing	LS-4840	4,000 kgs	48 mm.	1-7/8"	100 m./roll	OWB-5050

## ONE-WAY BUCKLE

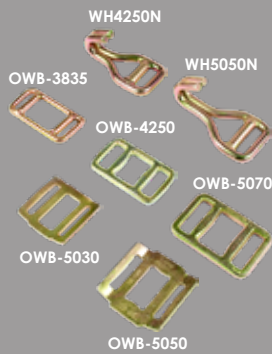

Description	Type	Breaking Strength	Width		Package
			mm.	inches	
One-Way Buckle	OWB-3516	1,600 kgs	35 mm.	1-3/8"	200 pcs/box
One-Way Buckle	OWB-3830	3,000 kgs	35 mm.	1-3/8"	240 pcs/box
One-Way Buckle	OWB-3835	3,500 kgs	38 mm.	1-1/2"	100 pcs/box
One-Way Buckle	OWB-4250	5,000 kgs	42 mm.	1-5/8"	50 pcs/box
One-Way Buckle	OWB-5070	7,000 kgs	52 mm.	2"	50 pcs/box
One-Way Buckle	OWB-5030	3,000 kgs	52 mm.	2"	150 pcs/box
One-Way Buckle	OWB-5050	5,000 kgs	52 mm.	2"	200 pcs/box
No Sewn Hook	WH4250N	5,000 kgs	42 mm.	1-5/8"	60 pcs/box
No Sewn Hook	WH5050N	5,000 kgs	50 mm.	2"	50 pcs/box

## TENSIONERS, Heavy Duty Type



**RB5050XB**

Extra Heavy duty Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
Stainless steel & Cast iron



**RB5050LHE**

Extra Heavy duty Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing



**MUL-395**

Giant Heavy duty Tensioner.  
For 1-1/2"-2" Webbing  
Made in USA.



**RB5050NS**

Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing



**RB5050NL**

Long Handle Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
ERGONOMIC DESIGN




**TP-580**

Heavy duty, Robust tensioner,  
Super Strong  
For 1"-2" Cord strapping  
and Lash Webbing




# ONE-WAY BUCKLE

**OWB-3516**




One-Way Buckle, Carbon Steel  
For 35 mm. ( 1-3/8" )  
B/S : 1,600 kgs ( 3,500 lbs )

**WB-5030**




Wire Buckle Galv., Carbon Steel  
For 50 mm. ( 2" )  
B/S : 3,000 kgs ( 6,600 lbs )

**OWB-3530**




One-Way Buckle, Forged Steel  
For 35 mm. ( 1-3/8" )  
B/S : 3,000 kgs ( 6,600 lbs )

**OWB-3835**




One-Way Buckle, Welded Type  
Carbon Steel  
For 35 mm. ( 1-3/8" )  
B/S : 3,500 kgs ( 7,700 lbs )

**OWB-4250**




One-Way Buckle, Forged Steel  
For 42 mm. ( 1-5/8" )  
B/S : 5,000 kgs ( 11,000 lbs )

**OWB-5070**





One-Way Buckle, Forged Steel  
For 50 mm. ( 2" )  
B/S : 7,000 kgs ( 14,000 lbs )

**OWB-5050**




One-Way Buckle, Carbon Steel  
For 50 mm. ( 2" )  
B/S : 5,000 kgs ( 11,000 lbs )

**OWB-5030**





One-Way Buckle, Carbon Steel  
For 50 mm. ( 2" )  
B/S : 3,000 kgs ( 6,600 lbs )

**WH-4250N**



No Sewn Hook, Carbon Steel  
For 42 mm. ( 1-5/8" )  
B/S : 5,000 kgs ( 11,000 lbs )


**WH-5050N**



No Sewn Hook, Carbon Steel  
For 50 mm. ( 2" )  
B/S : 5,000 kgs ( 11,000 lbs )


# TENSIONERS

**RB5050NS**




Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
B/S : 5,000 kgs/11,000 lbs

**RB5050NL**




Long Handle Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
B/S : 5,000 kgs/11,000 lbs  
ERGONOMIC DESIGN

**RB5050XB**




Extra Heavy duty Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
B/S : 5,000 kgs/11,000 lbs  
Stainless steel & Cast iron

**RB5050LHE**




Extra Heavy duty Ratchet Tensioner.  
For 1-1/2"-2" Lash Webbing  
B/S : 5,000 kgs/11,000 lbs

**TP-580**



Heavy duty, Robust tensioner, Super Strong  
For 1"-2" Composite strapping and Lash Webbing  
B/S : 5,000 kgs/11,000 lbs

**MUL-395**



Giant Heavy duty Tensioner.  
For 1-1/2"-2" Webbing  
B/S : 5,000 kgs/11,000 lbs  
Made in USA.



- ☑ 100 % High tenacity polyester fibre
- ☑ Heavy duty load up to 5,000 kgs.
- ☑ Strong, Safe cost and time
- ☑ Light weight & Easy to use
- ☑ Protect Surface & Finish products
- ☑ Prevent damage
- ☑ Elongation & Shock absorbing
- ☑ Chemical resistant
- ☑ Without Rust, Rot & mildew
- ☑ Certified standard B.S. 3481





RB5050NL

RB5050XB

RB5050LHE

MUL-395

OWB-4250

OWB-5070

WB-5030

TP-580



**TECHNICAL LIFT-ALL CO., LTD.**

124/137/7 Tiwanon Rd., T. Taladkwan, A. Muang, Nonthaburi 11000

Tel. 02-968-1896-8 Fax : 02-968-1899

E-mail : [technical@liftall.co.th](mailto:technical@liftall.co.th), [sales@liftall.co.th](mailto:sales@liftall.co.th)

[www.liftall.co.th](http://www.liftall.co.th)



[www.liftall.co.th](http://www.liftall.co.th)



@liftall



liftallofficial



lift\_all



Technical Lift All



lift\_all